

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH5018 SERIES

FEATURES:

- Magnetically Shielded Structure
- Low DC Resistance
- Large current up to 1.8A
- Excellent Mechanical Strength
- High Reliability and Excellent Solderability
- Low and square Profile
- High heat resistance

COMMON APPLICATIONS:

- VCRs, Notebook, DC/DC Converters
- Video Digital Cameras
- Communication System
- Automotive Systems Power supplier
- LCD PDP Televisions
- Hard Disk Drives, Topset, XDSL
- Network Systems
- Computer Peripheral Equipment




ELECTRICAL CHARACTERISTICS:

Part Number	L (μ H)	Test Freq (kHz)	DCR Ω Max	IDC Max A
SDRH5018-1R2□	1.2	100	0.054	1.80
SDRH5018-1R8□	1.8	100	0.065	1.60
SDRH5018-2R3□	2.3	100	0.076	1.50
SDRH5018-3R6□	3.6	100	0.097	1.20
SDRH5018-4R3□	4.3	100	0.100	1.10
SDRH5018-5R1□	5.1	100	0.130	1.00
SDRH5018-6R8□	6.8	100	0.150	0.94
SDRH5018-100□	10	100	0.220	0.80
SDRH5018-150□	15	100	0.325	0.64
SDRH5018-180□	18	100	0.380	0.56
SDRH5018-220□	22	100	0.540	0.49
SDRH5018-330□	33	100	0.770	0.41
SDRH5018-470□	47	100	1.120	0.33

□:1. K= $\pm$ 10%,M= $\pm$ 20%,N= $\pm$ 30%

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:


DIMENSIONS IN:mm

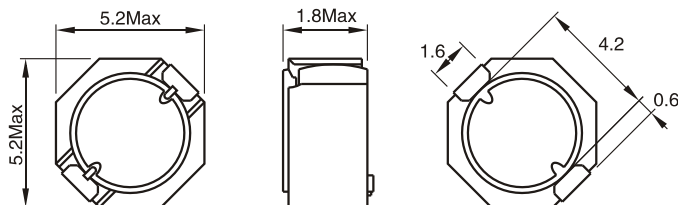

CONSTRUCTION



LAND PATTERNS



- Inductor Testing: HP4284A (Equivalent acceptable)
- DCR:QuadTech 1880 Milliohm meter
- Q- HP4342A – SRF-HP4191A
- IDCMax current is decreased 10% against its initial value
- Operating temperature: -40°C to $+105^{\circ}\text{C}$
- Storage Temperature: -40°C to $+105^{\circ}\text{C}$
- Solder methods: Vapor Phase,Infrared Reflow
- Resistance to soldering heat: 260°C for 10 seconds
- Solvent resistance: Conforms to MIL-STD-202E
- Marking: Inductance & Tolerance

Note:All specifications subject to change without notice.